


CTL 2X9W

Compact Emergency Twinspot

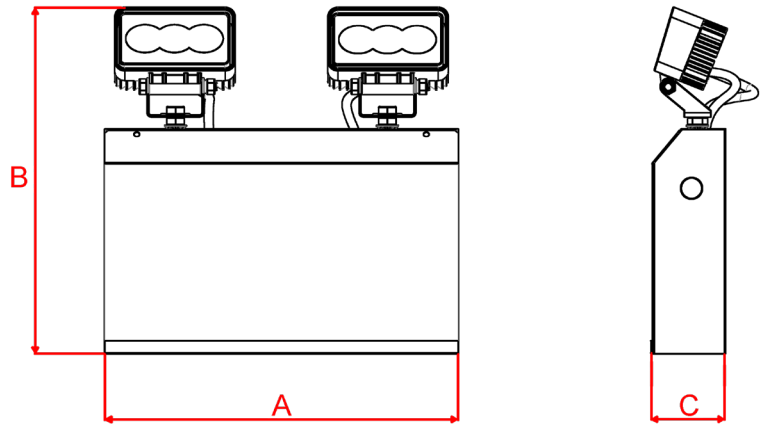

Materials

Housing: Powder Coated Sheet Steel
Lamp Heads: Die cast aluminum with polycarbonate lenses

Housing Colour: White RAL 9016
Other colours available on request

Warranty

Standard Warranty: 3 Years
Alternative Warranty: 6 Years
Add /6Y to Order Code

Order Code	CTL2X9WLED/NM3
Mode of operation	Non-maintained
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Battery charger	Fully automatic, current limited constant voltage
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP40
Overall dimensions (mm)	330mm L x 310mm H x 69mm D
Battery	Rechargeable sealed lead acid battery 12V 7Ah x 1
Power consumption	20VA for 24 hours upon initial charge <9VA once charged
Cable entry	20mm on sides and rear of product
Emergency duration	3 hours
Weight	5.1 kg
Packaging Weight	0.23 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 30°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)		
						A	B	C
Standalone	CTL2X9WLED/NM3	Non-Maintained	12V 7Ah Sealed Lead Acid	70162	2 x 490	330	310	69
Alternative Systems Available:								
DALI Central Battery	ZCTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	330	310	69
Central Battery	ZCTL2X9WLED240S	Slave	n/a	n/a	2 x 490	330	310	69
DALI	CTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	330	310	69