
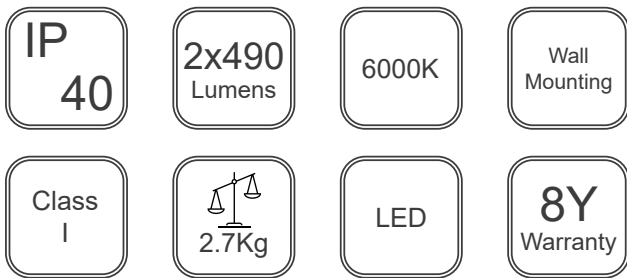


# CTL 2X9W

## Compact Emergency Slave Twinspot

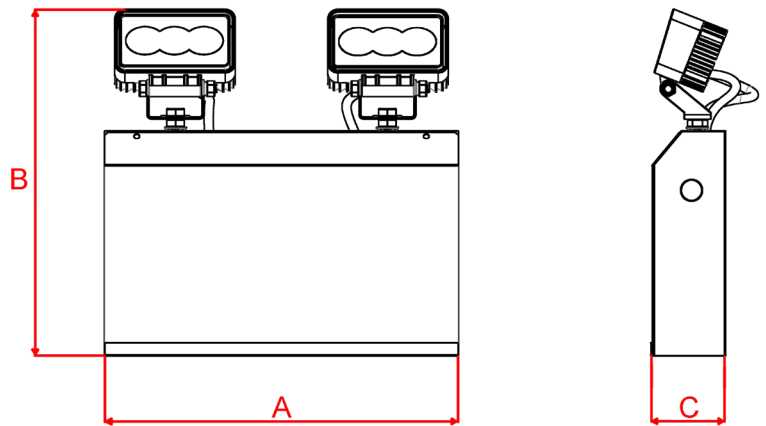

Order Code	ZCTL2X9WLED240S
Mode of operation	Slave
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP40
Power consumption	37VA
Cable entry	20mm on sides and rear of product
Weight	2.7 kg
Packaging Weight	0.23 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 55°C up to 80% relative humidity

## Materials

Housing: Powder Coated Sheet Steel  
 Lamp Heads: Die cast aluminum with polycarbonate lenses

Housing Colour: White RAL 9016  
 Other colours available on request

## Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)		
						A	B	C
Central Battery	ZCTL2X9WLED240S	Slave	n/a	n/a	2 x 490	330	310	69
Alternative Systems Available:								
Standalone	CTL2X9WLED/NM3	Non-Maintained	12V 7Ah Sealed Lead Acid	70162	2 x 490	330	310	69
DALI	CTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	330	310	69
DALI Central Battery	ZCTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	330	310	69