


EXLUX

Box Exit DALI Slave

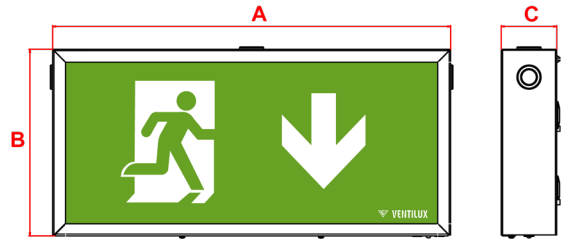

| | | | |
|------------|----------------|----------------------------|-----------------|
| IP 40 | 8Y Warranty | 36m Viewing Distance | Wall Mounted |
| Class I | 1.8 Kg | 1W | 6500K |

| | |
|----------------------|--------------------------------------------------------------------------------------------------------------------------|
| Order Code | ZEXLED230S**DA |
| Mode of operation | Slave DALI |
| Input voltage | 230/240V (207Vac - 264Vac) 50/60Hz |
| Power consumption | 7.2VA Irated = 30mA |
| Lamp | 12x Samsung White LED |
| Lamp Life | L ₈₀ B ₅₀ 80000 Hours |
| Nominal lamp current | Irated 0.35A CC |
| Nominal lamp power | P _{rated} = 1W |
| Degree of protection | IP40 - for indoor use only. |
| Cable entry | Two 20mm conduit points on top of fitting, single 20mm conduit point on either side, and rear BESA terminal box mounting |
| Luminaire class | Class I |
| Weight | 1.8kg |
| Packaging Weight | 0.161kg |
| Standards | BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22 |
| Environment | 0°C to 45°C up to 80% relative humidity. |

Materials

Housing: Painted Steel
 Panel Legend: Polycarbonate
 Standard Colour: White Ral 9016
 Alternative Colour: Black - RAL 9017
 Add /BL to order code

Warranty

Standard Warranty: 8 Years
 Alternative Warranty: 10 Years
 Add /10Y to order code

| System | Order Code | Mode of Operation | Battery | Battery P/N | Viewing Distance | Dimensions (mm) | | |
|--------------------------------|----------------|-------------------|-----------------|-------------|------------------|-----------------|-----|----|
| | | | | | | A | B | C |
| DALI Central Battery | ZEXLED230S**DA | Slave | n/a | n/a | 36 Metres | 430 | 201 | 60 |
| Alternative Systems Available: | | | | | | | | |
| Standalone | EXM3/LED ** | Maintained | 4.8V 1.3Ah NiMh | 70229 | 36 Metres | 430 | 201 | 60 |
| Central Battery | EX/LED/230S ** | Slave | n/a | n/a | 36 Metres | 430 | 201 | 60 |
| DALI | EXM3/LED/**/DA | Maintained | 3.6v 2.1Ah NiMh | 70251 | 36 Metres | 430 | 201 | 60 |

Alternative Legends



Replace ** with 01 for application of Left Arrow
 PN: 01710



Replace ** with 02 for application of Down Arrow
 PN: 01733



Replace ** with 03 for application of Right Arrow
 PN: 01754



Replace ** with 04 for application of Up Arrow
 PN: 01775