


# EXLUX IP67

## IP67 Surface Mounted Self-Test Exit

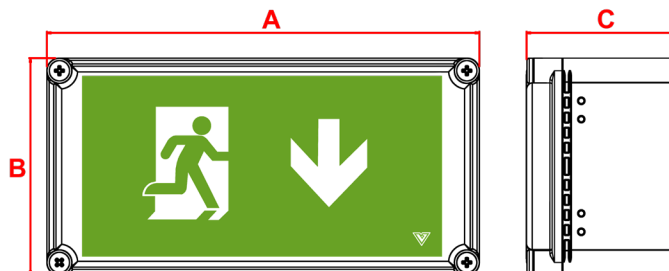

IP 67	8Y Warranty	IK 10	Wall Mounted
32m Viewing Distance	1.8 Kg	Ni-Cd Battery	6500K

### Materials

Housing: Polycarbonate  
 Lid: Polycarbonate  
 Adhesive Legend: Polycarbonate  
 Gear-Tray: Painted Steel

Standard Colour: Grey Ral 7032

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10Y to order code

Order Code	ZEXM3LIP67**ST
Mode of Operation	Maintained Self-Test
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA
Battery Type	Rechargeable Ni-Cd 3.6V, 4.5Ah
Battery low voltage cut off	3V
Battery discharge current @ 3.6Vdc	0.485A
Battery discharging limits	0.3-0.6A
Lamp	8 x High Powered White LEDs
Lamp Life	$L_{80}^{B50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Weight	1.8kg
Packaging Weight	0.22kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Self-Test	ZEXM3LIP67**ST	Maintained	3.6V 4.5Ah NiCd	70151	32 Metres	379	189	132
Alternative Systems Available:								
Standalone	EXM3/LEDIP67/**	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	379	189	132
DALI	ZEXM3LIP67DAL**	Maintained	3.6V 4.5Ah NiCd	70151	32 Metres	379	189	132
Central Battery	ZEXLED240SIP**	Slave	n/a	n/a	32 Metres	379	189	132
DALI Central Battery	ZEXLED230S**DA	Slave	n/a	n/a	32 Metres	379	189	132


### Alternative Legends



Replace \*\* with 01 for application of Left Arrow  
 PN: 01970



Replace \*\* with 02 for application of Down Arrow  
 PN: 01971



Replace \*\* with 03 for application of Right Arrow  
 PN: 01972



Replace \*\* with 04 for application of Up Arrow  
 PN: 01973