


# EXLUX PLUS

IP67 Box Exit

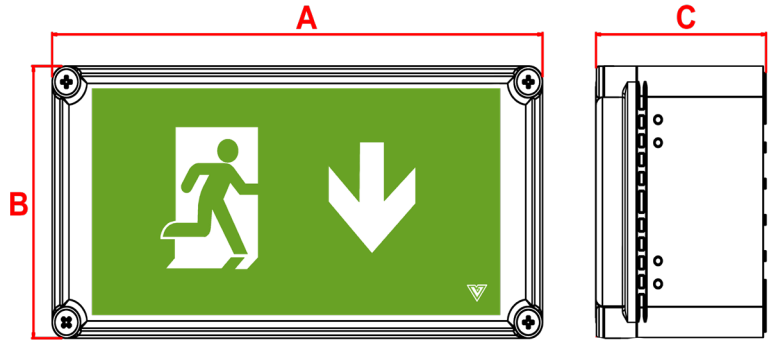

IP 67	8Y Warranty	IK 10	Wall Mounted
48m Viewing Distance	4.5 Kg	NiCd Battery	6500K

## Materials

Housing: Polycarbonate  
Lid: Polycarbonate  
Adhesive Legend: Polycarbonate  
Geartray: Sheet Steel

Standard Colour: Grey Ral 7032

## Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add /10Y to order code

Order Code	ZEXM3LIP67XL**
Mode of Operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	15.5VA, $I_{nom} = 0.065A$
Battery charger	Nominal charge 0.18A
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	1.2A
Battery discharging limits	up to 1.3A for 3 hours
Lamp	2 X Osram LED strips
Lamp Life	$L_{80}^{B_{50}}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 8W$ (2x4W)
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Weight	4.5kg
Packaging Weight	0.25kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	ZEXM3LIP67XL**	Maintained	4.8V 4.5Ah NiCd	70123	58 Metres	600	300	150
Alternative Systems Available:								
DALI	ZEXM3LIP67XLD02	Maintained	4.8v 4.5Ah NiMh	70240	58 Metres	600	300	150


## Alternative Legends



Replace \*\* with 01 for application of Left Arrow  
PN: Z2289



Replace \*\* with 02 for application of Down Arrow  
PN: Z2255



Replace \*\* with 03 for application of Right Arrow  
PN: Z2290



Replace \*\* with 04 for application of Up Arrow  
PN: Z2210