



Fusion

Multi-Mounted Exit Sign

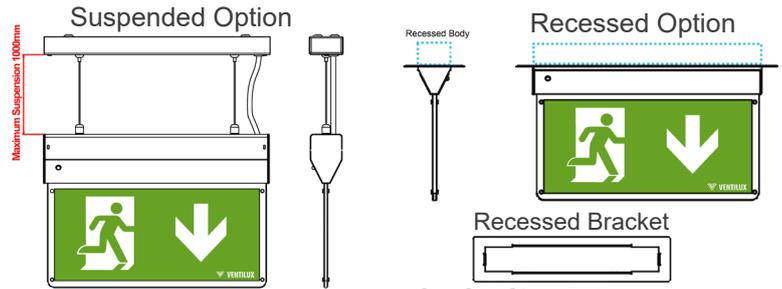

Cut Out Size: 330mm x 60mm
Minimum Ceiling Void 60mm

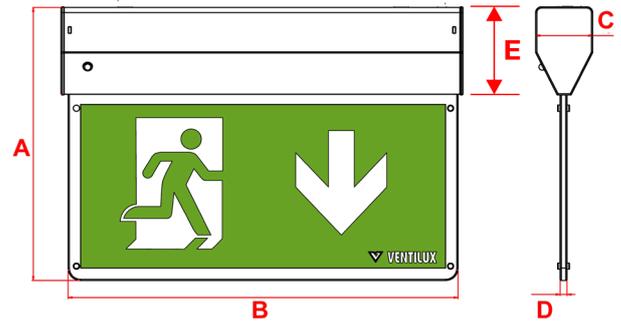

Order Code	FSM3/LED*
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	4VA, I _{nom} = 17mA (Full Battery)
Battery type	Rechargeable high temp Ni-Cd 3.6V 0.8Ah
Battery low voltage cut off	3.4V DC
Battery discharge current @ 3.6V DC	0.15A
Lamp	0.4W LED
Lamp colour	6500K
Viewing Distance	25m
Lamp Lifetime	L ₈₀ B ₅₀ 80000 Hours
Nominal lamp voltage	V _{rated} = 2.8V DC
Nominal lamp current	I _{rated} = 0.14A CC
Nominal lamp power	P _{rated} = 0.4W
Maximum output voltage with no lamp connected	U-OUT = 5V DC
Ingress protection	IP20
Cable entry	Rear of product
Luminaire class	Class I
Weight	1.5 Kg
Packaging Weight	0.205 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

Materials

Housing: Aluminum
Panel: Polycarbonate
Decals: Polycarbonate

Standard Colour: *White - RAL 9016
Add /WH to Order Code
Alternative Colours: *Black - RAL 9017
Add /BL to Order Code
*Chrome
Add /BCH to Order Code

Warranty

Standard Warranty: 4 Years
Alternative Warranty: 8 Years
Add /8Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	FSM3/LED*	Maintained	3.6V, 0.8Ah Ni-Cd	70145	25m	218	310	45	5.5	65

Included Legends



ISO 01



ISO 02



ISO 03



ISO 04