
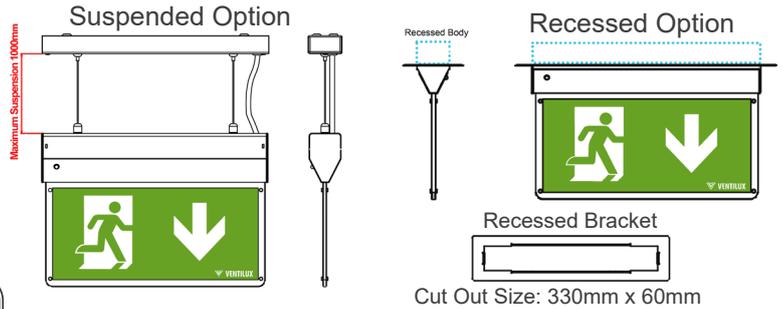


# Fusion

## Multi-Mounted Self-Test Exit Sign

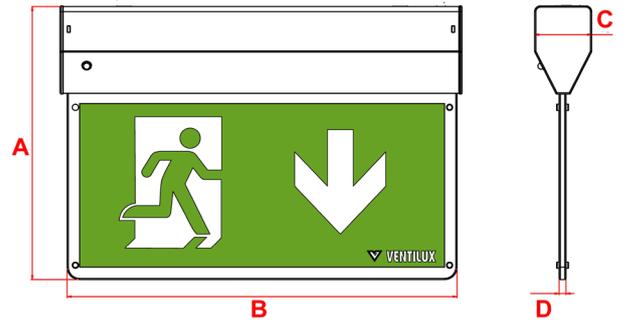

25 Viewing Distance	IP 20	LiFePO4 Battery	Ceiling, Recessed and Wall Mounting
1.75Kg	6500K	Class I	8Y Warranty

Order Code	FSM3/LED/**/ST
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	4.5VA I <sub>nom</sub> = 19mA (Full Battery)
Battery type	Rechargeable LiFePO4 Battery 3.2V 3.2Ah
Battery low voltage cut off	2.5V DC
Battery discharge current @ 3.2V DC	0.43A
Lamp	1W LED
Lamp colour	6500K
Lamp Life	L <sub>80 B50</sub> 80000 Hours
Nominal lamp voltage	V <sub>rated</sub> = 3V DC
Nominal lamp current	I <sub>rated</sub> = 0.35A
Nominal lamp power	P <sub>rated</sub> = 1W
Maximum output voltage with no lamp connected	U-Out=10V
Ingress Protection	IP20
Cable entry	Side of product
Luminaire class	Class I
Product Weight	1.75Kg
Packaging Weight	0.205Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

## Materials

Housing: Aluminum  
 Panel: Polycarbonate  
 Decals: Polycarbonate

Standard Colour: White - RAL 9016  
 Add /WH to \*\* on Order Code

Alternative Colours: Black - RAL 9017  
 Add /BL to \*\* on Order Code  
 Chrome  
 Add /BCH to \*\* on Order Code

## Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)			
						A	B	C	D
Self Test	FSM3/LED/**/ST	Maintained	3.2V 3.2Ah LiFePO4	70261	25m	218	310	45	5.5
Alternative Systems Available: Specification Sheets Available Upon Request									
Standalone	FSM3/LED/**	Maintained	3.6V 0.8Ah Ni-Cd	70145	25m	218	310	45	5.5
DALI	FSM3/LED/**/DA	Maintained	3.2V 3.2Ah LiFePO4	70261	25m	218	310	45	5.5

## Included Legends



ISO 01



ISO 02



ISO 03



ISO 04