


# HALO IP65 Gen 2

## Recessed Downlight IP65

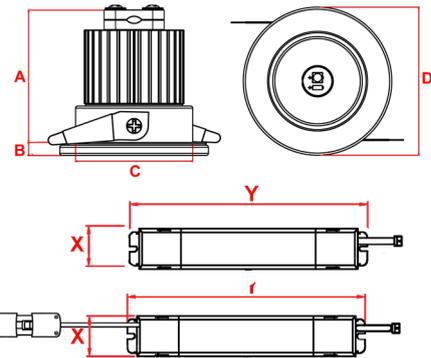

230 Lumens	3 Watts	6000K	Recessed Mounting
LiFePO4 Battery	Class II	IP 65	8Y Warranty

### Materials

Lamp Head: Spun Aluminium  
 Lens: Polycarbonate  
 Remote Pack: Flame Retardant ABS

Standard Colour: White - RAL 9016  
 Alternative Colours Available Upon Request

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10 Years to Order Code

Order Code	<b>HA2NM3/LEDIP65</b>
Mode of operation	Non-Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	2VA, I <sub>nom</sub> = 8mA (Full Battery)
Battery type	Rechargeable LiFePO4 Battery 6.4V 1.5Ah
Battery low voltage cut off	5.4V DC
Battery discharge current @ 6.4V DC	0.32A
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	230 lm
Nominal lamp voltage	V <sub>rated</sub> = 3V DC
Nominal lamp current	I <sub>rated</sub> = 0.53A CC
Nominal lamp power	P <sub>rated</sub> = 2W
Maximum output voltage with no lamp connected	U-OUT = 10VDC
Ingress Protection	IP65 (LED Head) IP40 (Control Gear)
Cut-Out	44mm Cut-Out
Minimum Ceiling Void (From top of Ceiling Surface)	200mm Ceiling Void
Maximum Ceiling Surface Thickness	18mm
Cable entry	Recessed Pack
Luminaire class	Class II
Product Weight	0.50 Kg
Packaging Weight	0.051 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)					
						A	B	C	D	X	Y
Standalone	HA2NM3/LEDIP65	Non-Maintained	6.4V, 1.5Ah LiFePO4	70267	230	46	4.5	41	50	28	196
Alternative Systems Available: Specification Sheets Available Upon Request											
DALI	HA2NM3/LEDIP65DA	Non-Maintained	3.2V, 3.6Ah LiFePO4	70268	230	46	4.5	41	50	36	196
Central Battery*	ZHALED3W230SIP	Slave	-	-	300	46	4.5	41	50	50	220
DALI Central Battery*	ZHALED3W230SIPDA	Slave	-	-	300	46	4.5	41	50	56	200

### Photometrics

Mounting Height	Lighting level directly under Luminaire (Lux)	Luminaire Spacing (Metres)			
		0.5lx	1.0lx	0.5lx	1.0lx
2.5m	43.77	3.4	3.0	7.7	6.8
2.7m	37.53	3.5	3.2	8.1	7.0
3m	30.40	3.8	3.4	8.7	7.6
4m	17.11	4.6	4.1	10.2	9.2
6m	7.60	6.1	5.4	13.5	12.1
8m	4.28	7.3	6.0	16.5	14.7
10m	2.74	8.2	5.8	19.2	16.5

