


# I-Lux

## Spotlight- Recessed Pack

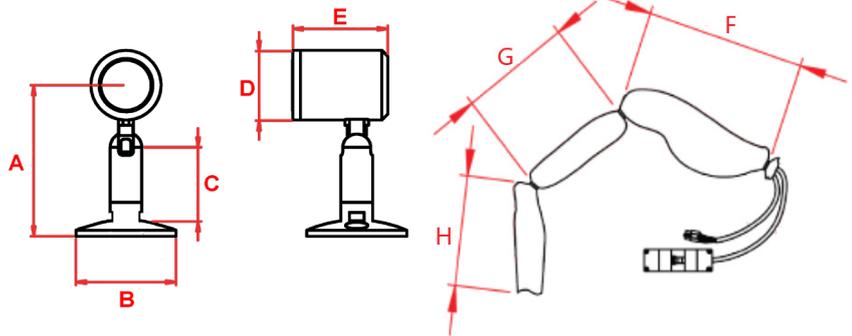

180 Lumens	3 Watts	6000K	Wall and Ceiling Mounting
Ni-Cd Battery	Class I	IP 40	8Y Warranty

Order Code	ZILUNM3LED3W*
Mode of operation	Non-maintained
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	3.5VA, I <sub>nom</sub> = 15mA
Battery type	Rechargeable Ni-Cd 4.8V 4.5Ah
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8VDC	0.59A
Lamp	3W
Lamp colour	6000K
Lamp lumen level in emergency	180lm
Nominal lamp current	I <sub>rated</sub> = 0.65A
Nominal lamp power	P <sub>rated</sub> = 3W
Maximum output voltage with no lamp connected	U-OUT = 7.0Vdc
Ingress protection	IP40
Luminaire class	Class I
Weight	0.9Kg
Packaging Weight	0.1kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22

## Materials

Housing: Die-Cast Aluminium  
Remote Pack: Silicone Sock

Standard Colour: Chrome  
Alternative Colours: \*White - RAL 9016  
Add **WH** to Order Code  
Alternative Colours Available Upon Request

## Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)							
						Spot					Control gear		
						A	B	C	D	E	F	G	H
Standalone	ZILUNM3LED3W*	Non-Maintained	4.8V, 4.5Ah Ni-Cd	70244	180	51	34	25	24	31	190	130	130
Alternative Systems Available: Specification Sheets Available Upon Request													
Central Battery	ZILULED3W*230S	Slave	-	-	180	51	34	25	24	31	190	N/A	N/A
DALI	ZILUNM3LED*DA	Non-Maintained	6V, 4.5Ah Ni-Cd	70157	260	51	34	25	24	31	190	180	130
DALI Central Battery	ZILULED3W*230SDA	Slave	-	-	180	51	34	25	24	31	190	N/A	N/A