
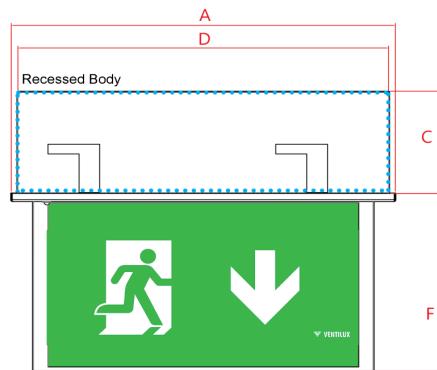


Recessed Stylux

DALI Slave Blade Exit Sign

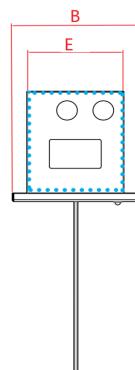

IP
40

1W
LED

28m
Viewing
Distance

Recessed
Ceiling
Mounted

Class
I

1.6 Kg

6Y
Warranty

6500K

Materials

Housing:	Sheet Steel
Front Plate:	Painted sheet steel
Panel Legend:	Polycarbonate
Standard Colour (front):	White Ral 9016
Alternative Colours:	Black -Add /BL to order code Chrome- Add /CH to order code

Order Code	ZRSTLED230SDA
Mode of operation	DALI Slave
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA Irated = 30mA
Lamp	12x Samsung White LED
Viewing Distance	28m
Lamp Lifetime	L ₈₀ B ₅₀ 80000 Hours
Nominal lamp current	Irated 0.35A CC
Nominal lamp power	Prated = 1W
Degree of protection	IP40
Ceiling Cut-Out Diameter	362mm X 96mm (Minimum Ceiling void-110mm)
Luminaire class	Class I
Weight	1.6kg
Packaging Weight	0.162kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity.

Warranty

Standard Warranty:	6 Years
Alternative Warranty:	10 Years Add /10Y to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)						
						A	B	C	D	E	F	
DALI Central Battery	ZRSTLED230SDA	DALI Slave	-	-	28 Metres	372	122	105	360	94	176	
Alternative Systems Available:												
Standalone	RSTM3/LED	Maintained	4.8V 1.3Ah NiMh	70229	28 Metres	372	122	105	360	94	176	
DALI	RSTM3/LED/DA	Maintained	3.6V 4.5Ah NiCd	70151	28 Metres	372	122	105	360	94	176	
Central Battery	ZRSTLED230S	Slave	-	-	28 Metres	372	122	105	360	94	176	

Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
PN: LPSTISO13MVL



Down Arrow (both sides)
PN: LPSTISO02MVL



Up Arrow (both sides)
PN: LPSTISO04MVL

Additional options of Printed Panels available. Contact Ventilux for further details.