


TREO

IP65 Slave Exit Box

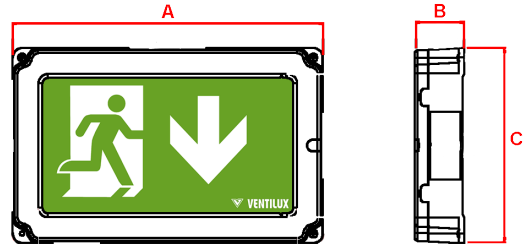

IP 65	6Y Warranty	IK 10	Wall Mounted
30M Viewing Distance	1.05Kg	Class I	6000K

Order Code	TR/LED/230S/*
Mode of operation	Slave
Input voltage	230/240V 50/60Hz
Power consumption	5VA
Lamp	P _{rated} = 1W LED
Lamp colour	6000K
Nominal Lamp Power in emergency	P _{rated} = 1W LED
Nominal Lamp Current in mains	0.35A
Viewing Distance	30 metres
Lamp Lifetime	L _{80 B50} 80000 Hours
Maximum output voltage with no lamp connected	U OUT = 24VDC
Ingress Protection	IP65
Impact Resistance	IK10
Cable Entry	To be Drilled and Glanded on installation
Luminaire class	Class I
Weight	1.05kg
Packaging Weight	0.103kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity.

Materials

Housing: ABS
 Decals: Polycarbonate

Standard Colour: White Ral 9016
 Alternative Colour: Black Ral 9017
 *add WH for White or BL for Black housing to order code

Warranty

Standard Warranty: 6 Years
 Alternative Warranty: 10 Years
 Add /10Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Central Battery	TR/LED/230S/*	Slave	n/a	n/a	30 Metres	323	52	203
Alternative Systems Available:								
Standalone	TRM3/LED/*	Maintained	3.2V 1.5Ah LiFePO4	70163	30 Metres	323	52	203
DALI	TRM3/LED/*/DA	Maintained	3.6V 2.1Ah NiMh	70158	30 Metres	323	52	203
DALI Central Battery	TR/LED/230S/*/DA	Slave	n/a	n/a	30 Metres	323	52	203


Legends (Supplied with Product)



01 for application of
Left Arrow



02 for application of
Down Arrow



3 for application of
Right Arrow



04 for application of
Up Arrow