


# Vanguard

## Ceiling Mounted DALI Exit

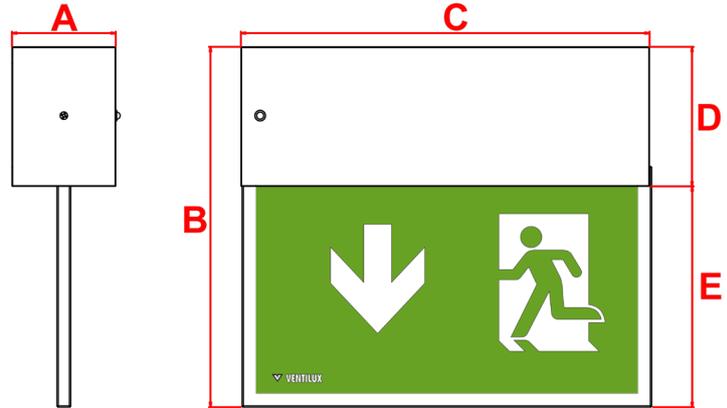

IP 40	6Y Warranty	Stainless Steel	Ceiling Mounted
32m Viewing Distance	2.3 Kg	NiMh Battery	Class I

Order Code	ZVGDM3LEDCMDALI
Mode of Operation	Maintained DALI
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA
Battery charger	Constant Current Nominal charge 0.05A
Battery low voltage cut off	3.0Vdc
Battery discharge current @ 3.6Vdc	0.485A
Battery	Rechargeable 3.6V 4Ah NiMh
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	$L_{80} B_{50}$ 80000 Hours
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	1.725 kg (no panel) 2.3 kg (c/w Panel fitted)
Packaging Weight	0.2 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

## Materials

Housing: Stainless Steel  
 Panel Legend: Acrylic

Standard Colour: Stainless Steel  
 Alternative Colour is available upon request

## Warranty

Standard Warranty: 6 Years  
 Alternative Warranty: 10 Years  
 Add /10Y to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
DALI	ZVGDM3LEDCMDALI	Maintained	3.6V 4Ah NiMh	70232	32 Metres	75	262	298	101.5	160.5
Alternative Systems Available:										
Standalone	VGDM3/LED/CM	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	75	262	298	101.5	160.5
Central Battery	ZVGDLED240SCM	Slave	n/a	n/a	32 Metres	75	262	298	101.5	160.5

## Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)  
 PN: LPVGDISO013VL



Down Arrow (both sides)  
 PN: LPVGDISO02VL



Up Arrow (both sides)  
 PN: LPVGDISO04VL

**Additional options of Printed Panels available. Contact Ventilux for further details.**