


Vanguard

Wall Mounted (WBK) DALI Exit

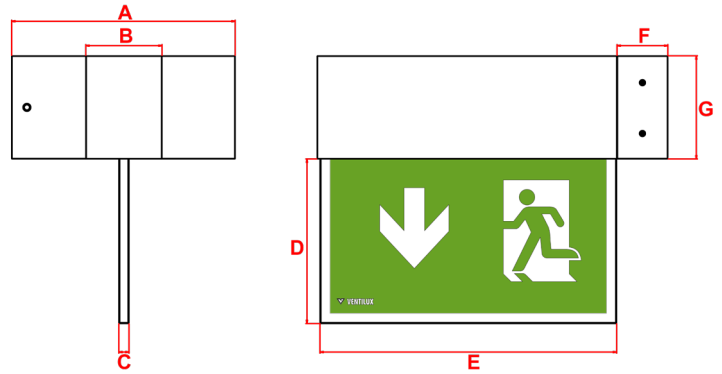

IP 40	8Y Warranty	Stainless Steel	Wall Mounted
32m Viewing Distance	3.3 Kg	NiMh Battery	Class I

Materials

Housing: Stainless Steel
Panel Legend: Acrylic

Standard Colour: Stainless Steel
Alternative Colours available upon request

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y to order code

Order Code	ZVGD3MLWBKDALI
Mode of Operation	Maintained DALI
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA
Battery low voltage cut off	3.0Vdc
Battery discharge current @ 3.6Vdc	0.485A
Battery	Rechargeable 3.6V 2.1Ah NiMh
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	$L_{80} B_{50}$ 80000 Hours
Nominal lamp current	I_{rated} 0.35A CC
Nominal lamp power	P_{rated} = 1W
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	2.75 kg (no panel) 3.3 kg (c/w Panel fitted)
Packaging Weight	0.28 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)						
						A	B	C	D	E	F	G
DALI	ZVGD3MLWBKDALI	Maintained	3.6V 2.1Ah NiMh	70272	32 Metres	220	75	10	162	290	50	101.5
Alternative Systems Available:												
Standalone	VGDM3/LED/WBK	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	220	75	10	162	290	50	101.5
Central Battery	ZVGDLED240SWBK	Slave	n/a	n/a	32 Metres	220	75	10	162	290	50	101.5


Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
PN: LPVGDISO013VL



Down Arrow (both sides)
PN: LPVGDISO02VL



Up Arrow (both sides)
PN: LPVGDISO04VL

Additional options of Printed Panels available. Contact Ventilux for further details.