


Vanguard

Wall Mounted Exit

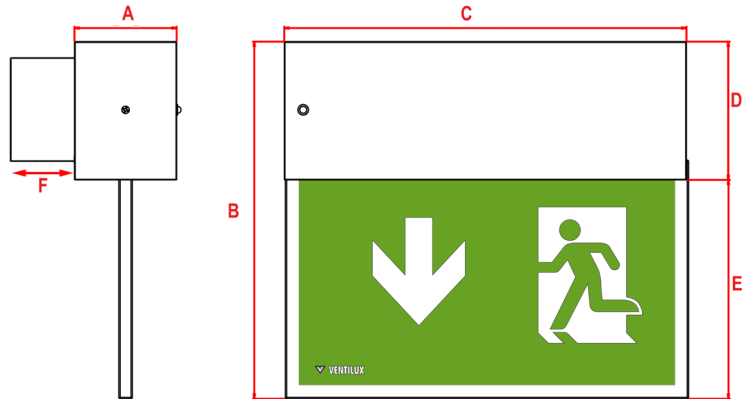

Materials

Housing: Stainless Steel

Panel Legend: Acrylic

Standard Colour: Stainless Steel

Alternative Colour: on request

Warranty

Standard Warranty: 6 Years

Alternative Warranty: 10 Years

Add /10Y to order code

Order Code	VGDM3/LED/WM
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Battery charger	Constant Current Nominal charge 0.05A
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	L _{80 B50} 80000 Hours
Nominal lamp current	I _{rated} = 0.35A
Nominal lamp power	P _{rated} = 1W
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	1.925 kg (no panel) 2.5 kg (c/w Panel fitted)
Packaging Weight	0.2 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)					
						A	B	C	D	E	F
Standalone	VGDM3/LED/WM	Maintained	4.8V 1.3Ah NiMh	70229	32 Metres	50	262	296	101.5	160.5	45
Alternative Systems Available:											
Central Battery	ZVGLED240SWM	Slave	n/a	n/a	32 Metres	50	262	296	101.5	160.5	45
DALI	ZVGDM3LEDWMDALI	Maintained	3.6V 4.5Ah NiMh	70272	32 Metres	50	262	296	101.5	160.5	45


Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
PN: LPVGDISO013VL



Down Arrow (both sides)
PN: LPVGDISO02VL



Up Arrow (both sides)
PN: LPVGDISO04VL

Additional options of Printed Panels available. Contact Ventilux for further details.

www.ventilux.com ● sales@ventilux.ie ● sales@ventilux.co.uk (UK Enquiries Only) ● SS2-046-01

We adopt a policy of continuous product and services improvement and we reserve the right to vary details without prior notice
For Warranty Terms please visit the Ventilux website