
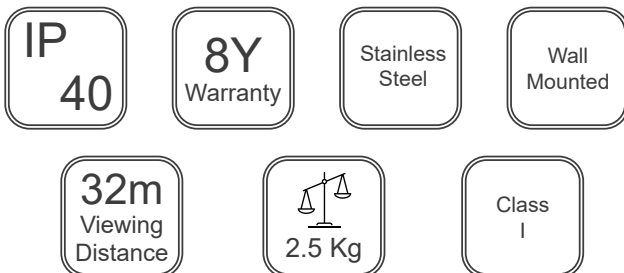
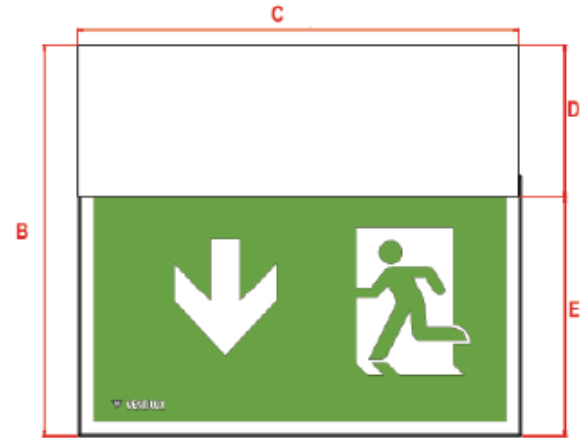


Vanguard

Wall Mounted (WM) Slave Exit

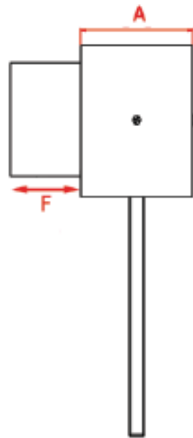

Materials

Housing: Stainless Steel
Panel Legend: Acrylic

Standard Colour: Stainless Steel
Alternative Colours available upon request

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y to order code

Order Code	ZVGDLED240SWM
Mode of Operation	Slave
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	L ₈₀ B ₅₀ 80000 Hours
Nominal lamp current	I _{rated} = 0.35A
Nominal lamp power	P _{rated} = 1W
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	1.925 kg (no panel) 2.5 kg (c/w Panel fitted)
Packaging Weight	0.2 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)					
						A	B	C	D	E	F
Central Battery	ZVGDLED240SWM	Slave	n/a	n/a	32 Metres	50	262	296	98	160.5	45
Alternative Systems Available:											
Standalone	VGDM3/LED/WM	Maintained	4.8V 1.3Ah NiMH	70229	32 Metres	50	262	296	98	160.5	45
DALI	ZVGD3LEDWMDALI	Maintained	3.6V 4Ah NiMH	70232	32 Metres	50	262	296	98	160.5	45

Legends (Ordered Separately)



Left /Right Arrow (Left one side, Right opposite side)
PN: LPVGDISO013VL



Down Arrow (both sides)
PN: LPVGDISO02VL



Up Arrow (both sides)
PN: LPVGDISO04VL

Additional options of Printed Panels available. Contact Ventilux for further details.