

### Materials

Housing: Painted Steel  
 Panel Legend: Acrylic

Standard Colour : \*\*White -Add **WH** to order code  
 Alternative Colours: \*\*Black -Add **BL** to order code  
 \*\*Brushed Chrome- Add **BCH** to order code


### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add **/10Y** to order code

Order Code	VAIM3/LED/WM**
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	5VA
Battery	Rechargeable 4.8V 1.3Ah NiMh
Battery charger	Constant Current Nominal charge 0.5A
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8Vdc	0.28A
Battery discharging limits	up to 0.4A for 3 hours
Lamp	8 x High Powered White Samsung LEDs
Lamp Life	L <sub>80</sub> P <sub>50</sub> 80000 Hours
Nominal lamp current	I <sub>rated</sub> = 0.35A
Nominal lamp power	P <sub>rated</sub> = 1W
Cable entry	20mm Rear entry
Luminaire class	Class I
Weight	2.1 kg
Packaging Weight	0.15 kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	VAIM3/LED/WM**	Maintained	4.8V 1.3Ah NiMh	70229	28 Metres	365	135	50	90	235
Alternative Systems Available:										
Central Battery	ZVAILEDWM**230S	Slave	n/a	n/a	28 Metres	365	135	50	90	235
DALI	ZVAIM3LEDWM**DA	Maintained	3.6V 4.5Ah NiMh	70272	28 Metres	365	135	50	90	235

### Legends (Ordered Separately)

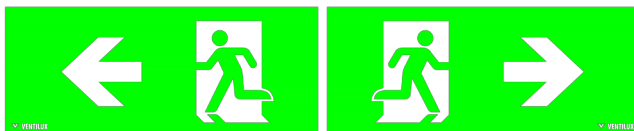

Left /Right Arrow (Left one side, Right opposite side)  
 PN: LPSTISO13MVL



Down Arrow (both sides)  
 PN: LPSTISO02MVL



Up Arrow (both sides)  
 PN: LPSTISO04MVL

**Additional options of Printed Panels available. Contact Ventilux for further details.**