
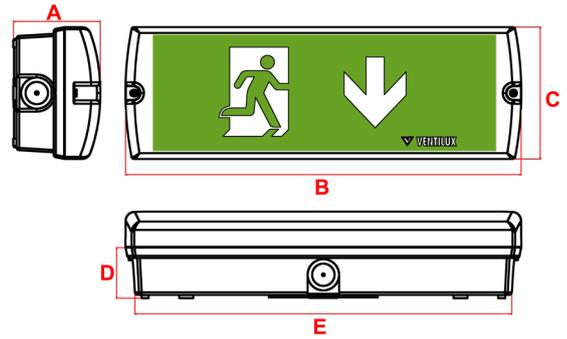


Visor

Surface Mounted Exit Sign

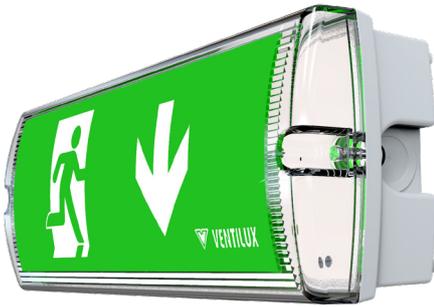

22m Viewing Distance	IP 65	Ni-Cd Battery	Wall and Ceiling Mounting
0.8Kg	6500K	Class I	4Y Warranty

Order Code	VIM3/LED/**
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	9.5VA, I _{nom} = 0.04A (Full Battery)
Battery type	Rechargeable high temp Ni-Cd 3.6V 1.5Ah
Battery low voltage cut off	3V DC
Battery discharge current @ 3.6V DC	0.3A
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	130lm
Lamp Lifetime	L ₈₀ B ₅₀
Nominal lamp voltage	V _{rated} = 2.9V DC
Nominal lamp current @ 3.6V	I _{rated} = 0.29A
Nominal lamp power @ 3.6V	P _{rated} = 0.8W
Maximum output voltage with no lamp connected	U-OUT = 6V AC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	0.8 Kg
Packaging Weight	0.093Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

Materials

Housing: Polycarbonate
 Adhesive Legend: Polycarbonate
 Standard Colour: White - RAL 9016

Warranty

Standard Warranty: 4 Years
 Alternative Warranty: 8 Years
 Add /8Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	VIM3/LED/**	Maintained	3.6V, 1.5Ah Ni-Cd	70149	22 Metres	77	352	118	45	335

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120

Alternative Legends



Replace ** with 01 for application of Left Arrow
 PN: 01731



Replace ** with 02 for application of Down Arrow
 PN: 01752



Replace ** with 03 for application of Right Arrow
 PN: 01773



Replace ** with 04 for application of Up Arrow
 PN: 01794