
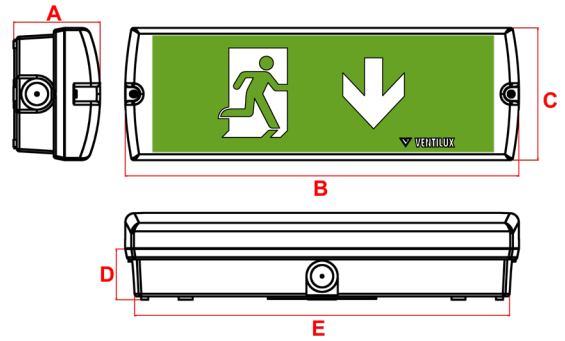


Visor Pro

Surface Mounted DALI Exit Sign

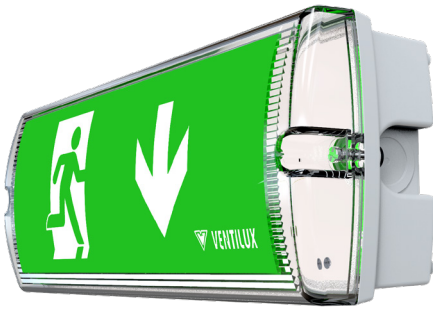

22m Viewing Distance	IP 65	Ni-Cd Battery	Wall Mounting
0.8Kg	6500K	Class I	8Y Warranty

Materials

Housing: Polycarbonate
Adhesive Legend: Polycarbonate
Standard Colour: White - RAL 9016

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y Years to Order Code

Order Code	ZVIPROM3LED**DA
Mode of operation	Maintained DALI
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	7.2VA, Inom = 30mA
Battery type	Rechargeable Ni-Cd Battery 3.6V 4.5Ah
Battery low voltage cut off	3V DC
Battery discharge current @ 3.6V DC	0.485A
Lamp Lifetime	L ₈₀ B ₅₀ 50000 Hours
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	188lm
Nominal lamp voltage	V _{rated} = 3V DC
Nominal lamp current	I _{rated} = 0.35A
Nominal lamp power	P _{rated} = 1W
Maximum output voltage with no lamp connected	U-OUT=10V DC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	0.8 Kg
Packaging Weight	0.093Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
DALI	ZVIPROM3LED**DA	Maintained	3.6V, 4.5Ah Ni-Cd	70151	22 Metres	77	352	118	45	335
Alternative Systems Available: Specification Sheets Available Upon Request										
Standalone	ZVIPROM3LED**	Maintained	4.8V, 1.3Ah Ni-Mh	70229	22 Metres	77	352	118	45	335
Central Battery	ZVIPROLED230S**	Slave	-	-	22 Metres	77	352	118	45	335
DALI Central Battery	ZVIPROLED230S**DA	Slave	-	-	22 Metres	77	352	118	45	335

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120

Alternative Legends




Replace ** with 01 for application of Left Arrow
PN: 01731



Replace ** with 02 for application of Down Arrow
PN: 01752



Replace ** with 03 for application of Right Arrow
PN: 01773



Replace ** with 04 for application of Up Arrow
PN: 01794