
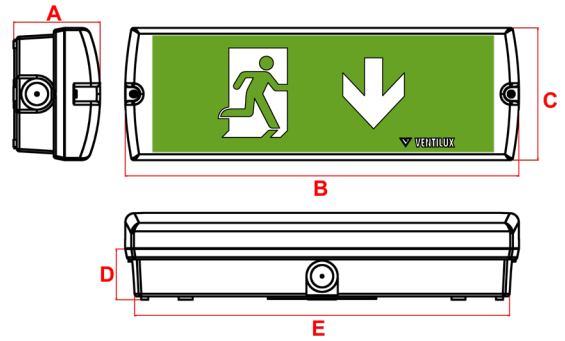


# Visor Pro

## Surface Mounted Exit Sign

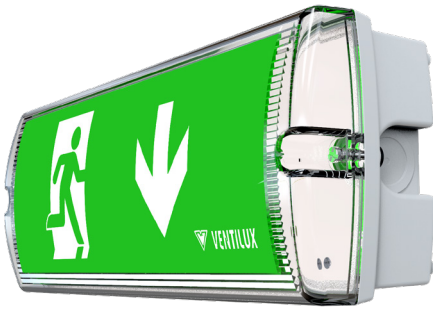

<b>22m</b> Viewing Distance	<b>IP</b> <b>65</b>	<b>Ni-Mh</b> Battery	<b>Wall</b> Mounting
<b>0.8Kg</b>	<b>6500K</b>	<b>Class</b> <b>I</b>	<b>8Y</b> Warranty

### Materials

Housing: Polycarbonate  
Adhesive Legend: Polycarbonate  
Standard Colour: White - RAL 9016

### Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add /10Y Years to Order Code

Order Code	VIPROM3/LED/**
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	5VA
Battery type	Rechargeable high temp Ni-Mh 4.8V 1.3Ah
Battery low voltage cut off	4V DC
Battery discharge current @ 4.8V DC	0.28
Lamp Lifetime	$L_{80}^{B_{50}}$ 50000 Hours
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	188lm
Nominal lamp voltage	$V_{rated} = 3V$ DC
Nominal lamp current @ 4.8V	$I_{rated} = 0.35A$
Nominal lamp power @ 4.8V	$P_{rated} = 1W$
Maximum output voltage with no lamp connected	U-OUT = 6V AC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	0.8 Kg
Packaging Weight	0.093Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Standalone	VIPROM3/LED/**	Maintained	4.8V, 1.3Ah Ni-Mh	70229	22 Metres	77	352	118	45	335
Alternative Systems Available: Specification Sheets Available Upon Request										
Central Battery	ZVPROLED230S**	Slave	-	-	22 Metres	77	352	118	45	335
DALI	ZVIPROM3LED**DA	Maintained	3.6V, 4.5Ah Ni-Cd	70151	22 Metres	77	352	118	45	335
DALI Central Battery	ZVPROLED230S**DA	Slave	-	-	22 Metres	77	352	118	45	335

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120


### Alternative Legends




Replace \*\* with 01 for application of Left Arrow  
PN: 01731



Replace \*\* with 02 for application of Down Arrow  
PN: 01752



Replace \*\* with 03 for application of Right Arrow  
PN: 01773



Replace \*\* with 04 for application of Up Arrow  
PN: 01794