
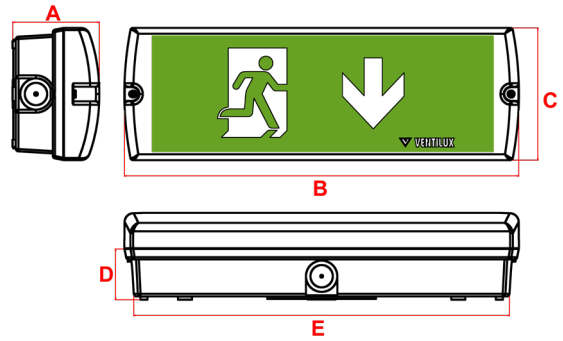


# Visor Pro

## Surface Mounted Slave Exit Sign

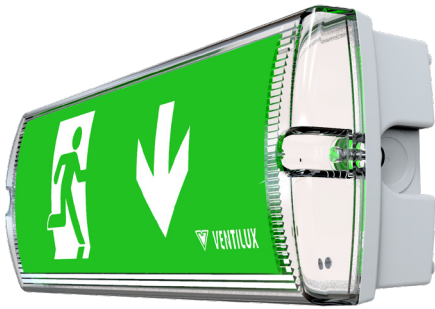

22m Viewing Distance	IP 65	188 Lumens	Wall Mounting
0.7Kg	6500K	Class I	8Y Warranty

### Materials

Housing: Polycarbonate  
 Adhesive Legend: Polycarbonate  
 Standard Colour: White - RAL 9016

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10Y Years to Order Code

Order Code	ZVIPROLED230S**
Mode of operation	Slave
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	5VA
Lamp Lifetime	L <sub>80</sub> B <sub>50</sub> 80000 Hours
Lamp	1W LED
Lamp colour	6500K
Lumen Level in emergency	188lm
Nominal lamp voltage	V <sub>rated</sub> = 3V DC
Nominal lamp current	I <sub>rated</sub> = 0.35A
Nominal lamp power	P <sub>rated</sub> = 1W
Maximum output voltage with no lamp connected	U-OUT = 6V AC
Ingress protection	IP65
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	0.625 Kg
Packaging Weight	0.093Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 55°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)				
						A	B	C	D	E
Central Battery	ZVIPROLED230S**	Slave	-	-	22 Metres	77	352	118	45	335
Alternative Systems Available: Specification Sheets Available Upon Request										
Standalone	ZVIPROM3LED**	Maintained	4.8V, 1.3Ah Ni-Mh	70229	22 Metres	77	352	118	45	335
DALI	ZVIPROM3LED**DA	Maintained	3.6V, 4.5Ah Ni-Cd	70151	22 Metres	77	352	118	45	335

Available Accessories			
Order Code	Description	Material	Cutout (mm)
VI/SRK	Semi-Recessing Kit	Painted Steel	350 x 120


### Alternative Legends



Replace \*\* with 01 for application of Left Arrow  
 PN: 01731



Replace \*\* with 02 for application of Down Arrow  
 PN: 01752



Replace \*\* with 03 for application of Right Arrow  
 PN: 01773



Replace \*\* with 04 for application of Up Arrow  
 PN: 01794