


WTL 2X9W

IP67 Emergency Twinspot

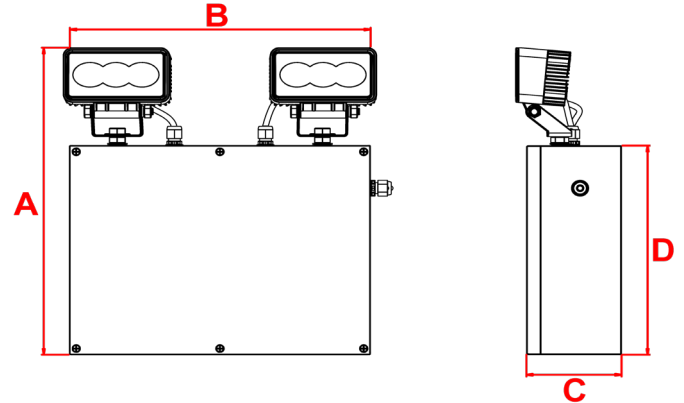

IP 67	4Y Warranty	Class I	Wall Mounting
2x490 Lumens	5.8Kg	SLA Battery	6000K

Order Code	WTL2X9WLED/NM3
Mode of operation	Non-maintained
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Battery charger	Fully automatic, current limited constant voltage
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP67
Battery	Rechargeable sealed lead acid battery 12V 7.0Ah
Power consumption	20VA for 24 hours upon initial charge <9VA once charged
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Emergency duration	3 hours
Weight	5.8 kg
Packaging Weight	0.235 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 30°C up to 80% relative humidity

Materials

Housing: Polycarbonate
Lamp Heads: Die cast aluminum with polycarbonate lenses

Standard Colour: Grey RAL 7032

Warranty

Standard Warranty: 4 Years

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
Standalone	WTL2X9WLED/NM3	Non-Maintained	12V 7Ah SLA	70162	2 x 490	348	316	100	237
Alternative Systems Available:									
DALI Central Battery	ZWTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	348	316	100	237
Central Battery	ZWTL2X9WL230S	Slave	n/a	n/a	2 x 490	348	316	100	237
DALI	WTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237