
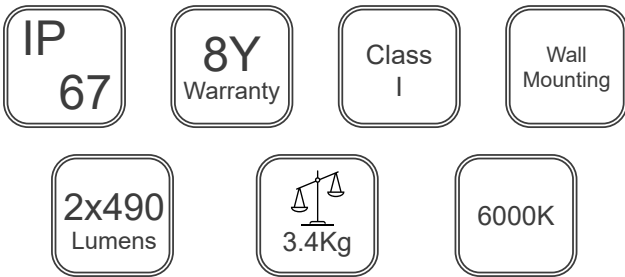


WTL 2X9W

IP67 Emergency Slave Twinspot

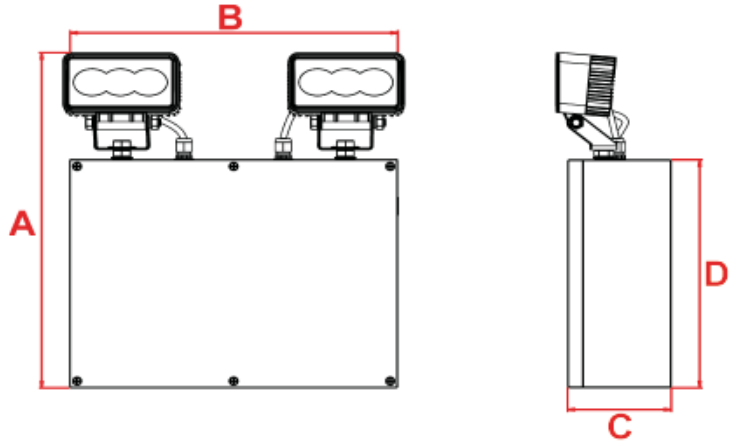

Order Code	ZWTL2X9WL230S
Mode of operation	Slave
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP67
Power consumption	37VA
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Weight	3.4kg
Packaging Weight	0.235 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 55°C up to 80% relative humidity

Materials

Housing: Polycarbonate
Lamp Heads: Die cast aluminum with polycarbonate lenses
Standard Colour: Grey RAL 7032

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)				
						A	B	C	D	
Central Battery	ZWTL2X9WL230S	Slave	n/a	n/a	2 x 490	348	316	100	237	
Alternative Systems Available:										
Standalone	WTL2X9WLED/NM3	Non-Maintained	12V 7Ah SLA	70162	2 x 490	348	316	100	237	
DALI	WTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237	
DALI Central Battery	ZWTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	348	316	100	237	