
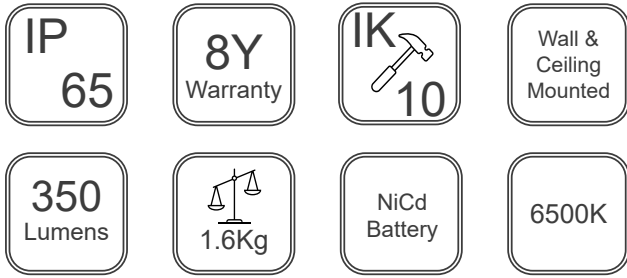
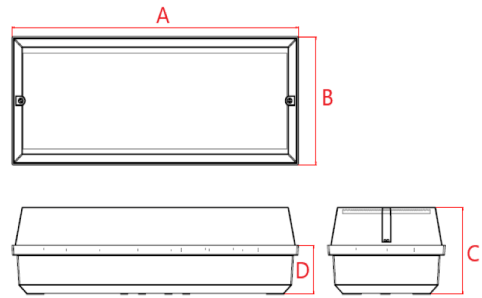


# Weather Proof

## IP65 3W DALI Emergency Bulkhead

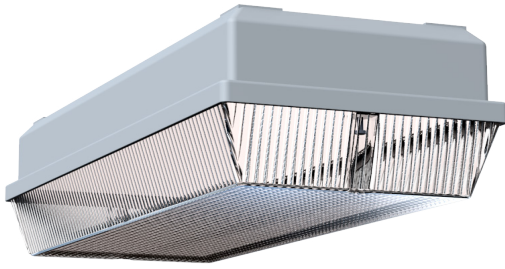

Order Code	<b>WPNM3/LED3W/DA</b>
Mode of operation	Non-Maintained DALI
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	8VA
Battery type	6V 4.5Ah NiCd
Battery low voltage cut off	5V
Battery discharge current @ 6V DC	0.85A
Lamp	15 Medium Power CREE LED's
Lamp colour	6500K
Lamp lumen level in emergency	350
Nominal lamp voltage	3V
Nominal lamp current	1A
Nominal lamp power	3 Watts
Maximum output voltage with no lamp connected	U-OUT=10V DC
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.6 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

## Materials

Housing: Polycarbonate (Base)  
Clear Polycarbonate (Diffuser)

Geartray: Painted sheet steel

Standard Colour: White RAL 9016  
Alternative Colours: Available on request

## Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add **/10Y** to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI	WPNM3/LED3W/DA	Non-Maintained	6V 4.5Ah NiCd	70153	350	368	150	102	58
<b>Alternative Systems Available:</b>									
Self-Contained	WPM3/LED3W/P	Maintained	4.8V 4.5Ah NiCd	70123	470	368	150	102	58
Self-Contained	WPNM3/LED/3W/P	Non-Maintained	4.8V 4.5Ah NiCd	70123	470	368	150	102	58
Central Battery	ZWPLED230S	Slave	n/a	n/a	470	368	150	102	58
DALI Wireless	WPNM3/LED5W/DAW	Non-Maintained	6.4V 6.4Ah LiFePO4	70258	800	368	150	102	58

### Available Accessories

Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
<b>WP/SRK</b>	<b>Semi-Recessing Kit</b>	<b>Painted Steel</b>	<b>360 x 143</b>	<b>398</b>	<b>179</b>

## Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
<b>2m</b>	<b>31.25</b>	6.0	4.9	14.4	11.9	13.4	11.1	12.4	10.2	5.1	4.2
<b>2.5m</b>	<b>20.02</b>	6.6	5.4	15.9	13.1	14.8	12.2	13.6	11.3	5.7	4.6
<b>3m</b>	<b>13.92</b>	7.1	5.8	17.3	14.2	16.0	13.2	14.8	12.2	6.1	4.5
<b>4m</b>	<b>7.84</b>	7.9	5.8	19.6	15.9	18.2	14.5	16.8	13.1	6.6	5.0
<b>6m</b>	<b>3.49</b>	6.9	5.3	23.0	13.8	20.5	14.1	18.0	14.3	7.2	5.3
<b>8m</b>	<b>1.96</b>	7.6	4.6	23.5	15.2	21.7	15.1	19.8	14.9	7.5	4.8
<b>10m</b>	<b>1.26</b>	7.2	4.0	20.9	14.4	21.0	14.5	21.0	14.6	7.3	3.2

