
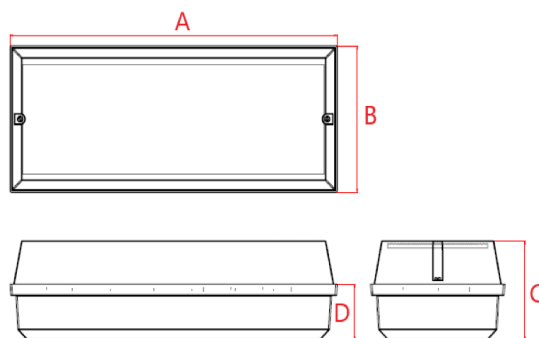


Weather Proof

IP65 Exit

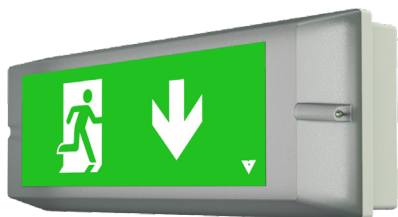

Materials

Housing: Polycarbonate (Base)
Opal Polycarbonate (Diffuser)
Adhesive Legend: Polycarbonate
Geartray: Powder coated sheet steel

Standard Colour: White RAL 9016
Alternative Colours: Available on request

Warranty

Standard Warranty: 8 Years
Alternative Warranty: 10 Years
Add /10Y to Order Code

Order Code	ZWPM3LED**LEG
Mode of operation	Maintained
Emergency duration	3 Hours
Input voltage	230-240V AC
Power consumption	5VA
Battery low voltage cut off	4.0Vdc
Battery discharge current @ 4.8V DC	0.28A
Lamp	8 x High Powered White Samsung LEDs
Lamp Lifetime	L ₈₀ B ₅₀
Lamp colour	6500K Cool White
Nominal lamp current	I _{rated} = 0.35A
Nominal lamp power	P _{rated} = 1W
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.2 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)			
						A	B	C	D
Standalone	ZWPM3LED**LEG	Maintained	4.8v 1.3Ah NiMH	70229	22 Metres	370	150	102	58
Alternative Systems Available:									
DALI	ZWPM3L**LEGDALI	Maintained	3.6V 4.5Ah NiCd	70151	22 Metres	370	150	102	58
Central Battery	ZWPLED230S**LEG	Slave	n/a	n/a	22 Metres	370	150	102	58


Legend to be selected



** add 01 to order code for
Arrow Left
Legend to be applied.
To order separately use code
01727



** add 02 to order code for
Arrow Down
Legend to be applied.
To order separately use code
01748



** add 03 to order code for
Arrow Right
Legend to be applied.
To order separately use code
01769



** add 04 to order code for
Arrow Up
Legend to be applied.
To order separately use code
01790