
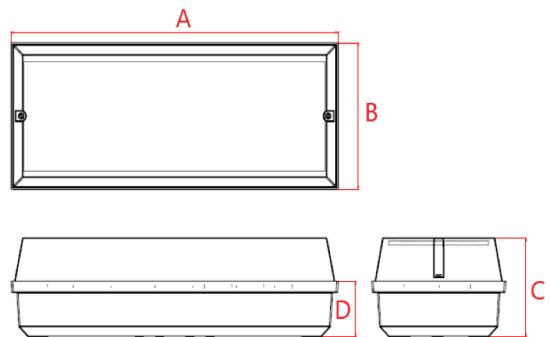


Weather Proof

IP65 Slave Exit

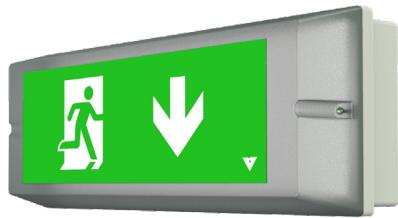

IP
65

6Y
Warranty

IK
10

Wall
Mounted

22M
Viewing
Distance

1Kg

Class
I

6500K

Materials

Housing:

Polycarbonate (Base)
Opal Polycarbonate (Diffuser)

Adhesive Legend:

Polycarbonate

Geartray:

Painted sheet steel

Standard Colour: White RAL 9016

Alternative Colours: Available on request

Warranty

Standard Warranty: **6 Years**

Alternative Warranty: **10 Years**

Add **/10Y** to Order Code

Order Code	ZWPLED230S**LEG
Mode of operation	Slave
Input voltage	230-240V AC
Power consumption	5VA
Lamp	8 x High Powered White Samsung LEDs
Lamp Lifetime	$L_{80} B_{50}$ 80000 Hours
Lamp colour	6500K Cool White
Nominal lamp current	$I_{rated} = 0.35A$
Nominal lamp power	$P_{rated} = 1W$
Ingress Protection	IP65
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1 Kg
Packaging Weight	0.17 Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 55°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)			
						A	B	C	D
Central Battery	ZWPLED230S**LEG	Slave	n/a	n/a	22 Metres	370	150	102	58
Alternative Systems Available:									
Standalone	ZWPML3LED**LEG	Maintained	4.8V 1.3Ah NiMh	70229	22 Metres	370	150	102	58
DALI	ZWPML3L**LEGDALI	Maintained	3.6V 4.5Ah NiCd	70151	22 Metres	370	150	102	58

Legend to be selected



** add 01 to order code for
Arrow Left
Legend to be applied.
To order separately use code
01727



** add 02 to order code for
Arrow Down
Legend to be applied.
To order separately use code
01748



** add 03 to order code for
Arrow Right
Legend to be applied.
To order separately use code
01769



** add 04 to order code for
Arrow Up
Legend to be applied.
To order separately use code
01790