


# EXLUX

## Double-Sided Box Exit DALI

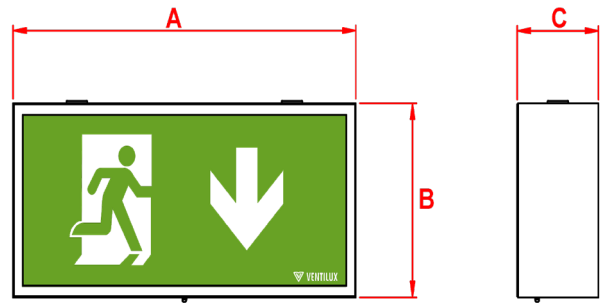

IP 40	8Y Warranty	36m Viewing Distance	Ceiling Mounted
Class I	2.2 Kg	NiMh Battery	6500K

Order Code	ZEXM3LED2DALI
Mode of operation	Maintained
DALI Interface	For Controlled Monitoring and Reporting
Emergency duration	3 hours
Input voltage	230/240V (207Vac - 264Vac) 50/60Hz
Power consumption	7.2VA $I_{rated} = 30mA$
Battery	Rechargeable Ni-Mh Battery 3.6V 2.1Ah
Lamp	2 x 8 Samsung White LED's
Lamp Life	$L_{80}^{B50} = 80000$ Hours
Colour Rendering Index (CRI)	>80
Nominal lamp voltage	3V
Nominal lamp current	$I_{rated} = 350mA$ CC
Nominal lamp power	$P_{rated} = 1W$
Degree of protection	IP40
Cable entry	Two 20mm conduit points on top of fitting
Luminaire class	Class I
Weight	2.2kg
Packaging Weight	0.16kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 45°C up to 80% relative humidity.

### Materials

Housing: Painted Steel  
 Panel Legend: Polycarbonate  
 Standard Colour: White Ral 9016  
 Alternative Colour: Black - RAL 9017  
 Add /BL to order code

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10Y to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
DALI	ZEXM3LED2DALI	Maintained	3.6V 2.1Ah Ni-Mh	70272	36 Metres	430	200	102
Alternative Systems Available:								
Standalone	EXM3/LED/2	Maintained	4.8V 1.3Ah NiMh	70229	36 Metres	430	200	102
Central Battery	EX/LED/230S/2	Slave	n/a	n/a	36 Metres	430	200	102


### Legends (Ordered Separately)




Left Arrow  
PN: 01710



Down Arrow  
PN: 01733



Right Arrow  
PN: 01754



Up Arrow  
PN: 01775