


# EXLUX

## Double-Sided Slave Box Exit

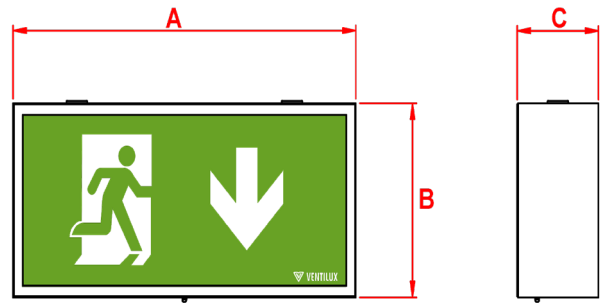

<b>IP</b> 40	<b>8Y</b> Warranty	<b>36m</b> Viewing Distance	<b>Ceiling Mounted</b>
<b>Class</b> I	 1.9 Kg	<b>6500K</b>	

Order Code	EX/LED/230S/2
Mode of operation	Slave
Input voltage	230/240V (207V AC - 264V AC) 50/60Hz
Power consumption	5VA, I <sub>nom</sub> = 0.025A
Lamp	2 x 8 String SM LED Strip
Lamp Life	L <sub>80</sub> B <sub>50</sub> 80000 Hours
Nominal lamp current	I <sub>rated</sub> = 0.35A
Nominal lamp power	P <sub>rated</sub> = 1W
Degree of protection	IP40 - for indoor use only.
Cable entry	Two 20mm conduit points on top of fitting,
Luminaire class	Class I
Weight	1.9kg
Packaging Weight	0.161kg
Standards	BS5266, EN62034, EN61347-2-7, EN61347-2-13, EN 60598-2-22
Environment	0°C to 55°C up to 80% relative humidity.

### Materials

Housing: Painted Steel  
 Panel Legend: Polycarbonate  
 Standard Colour: White Ral 9016  
 Alternative Colour: Black - RAL 9017  
 Add **/BL** to order code

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add **/10Y** to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Central Battery	EX/LED/230S/2	Slave	n/a	n/a	36 Metres	430	200	102
Alternative Systems Available:								
Standalone	EXM3/LED/2	Maintained	4.8V 1.3Ah NiMh	70229	36 Metres	430	200	102

### Legends (Ordered Separately)




Left Arrow  
PN: 01710



Down Arrow  
PN: 01733



Right Arrow  
PN: 01754



Up Arrow  
PN: 01775