


# CTL 2X5W

## Compact Emergency Self Test Twinspot

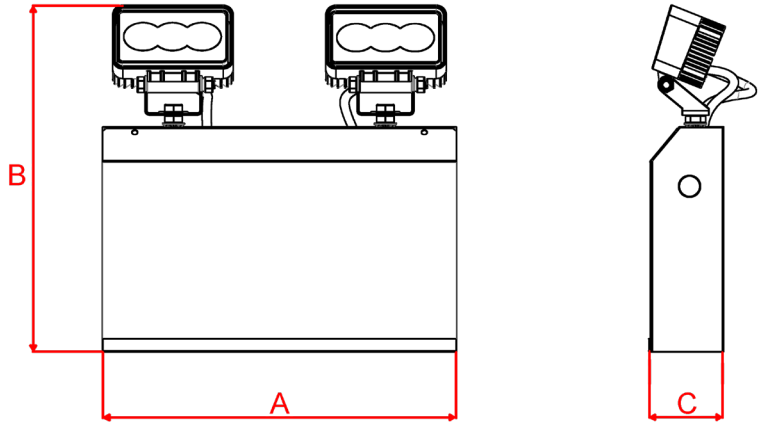

IP 40	6Y Warranty	2x350 Lumens	Wall Mounting
Class I	3.2Kg	LiFePO4 Battery	6000K

### Materials

Housing: Painted Sheet Steel  
Lamp Heads: Die cast aluminum with polycarbonate lenses

Housing Colour: White RAL 9016  
Other colours available on request

### Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add /10Y to Order Code

Order Code	CTL2X5WLED/NM3/ST
Mode of operation	Non-maintained Self Test
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	2.4VA (Full Battery)
Battery	Rechargeable LiFePO4 9.6V 6.4Ah
Battery discharge current @ 9.6V DC	1.15A
Battery discharging limits	up to 1.6A for 3Hrs
Lamp	2 x LED lamp heads total wattage 10 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	350 lumens for each lamp head
Lamp Life	L <sub>80</sub> B <sub>50</sub> 80000 Hours
Cable entry	20mm on sides and rear of product
Weight	3.2 kg
Packaging Weight	0.23 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)		
						A	B	C
Self Test	CTL2X5WLED/NM3/ST	Non-Maintained	LiFePO4 9.6V 6.4Ah	70255	2 x 350	330	310	69
<b>Alternative Systems Available:</b>								
Standalone	CTL2X9WLED/NM3	Non-Maintained	12V 7Ah Sealed Lead Acid	70162	2 x 490	330	310	69
DALI	CTL2X5WLED/NM3/DA	Non-Maintained	LiFePO4 9.6V 6.4Ah	70255	2 x 350	330	310	69
DALI Central Battery	ZCTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	330	310	69
Central Battery	ZCTL2X9WLED240S	Slave	n/a	n/a	2 x 490	330	310	69