


# Delta SM Gen 2

## Surface Mounted Downlight

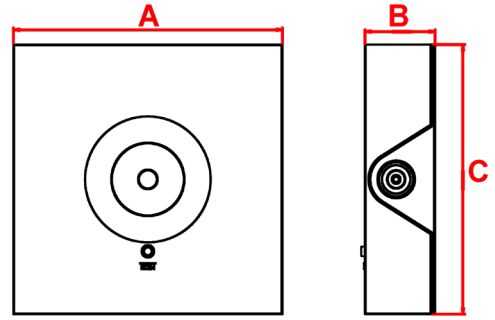

510 Lumens	2x2 Watts	5000K	Ceiling Mounting
LiFePO4 Battery	Class II	IP 40	8Y Warranty

Order Code	DE2NM3/L4W/**/SM
Mode of operation	Non-Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	4.2VA, I <sub>nom</sub> = 19mA (Full Battery)
Battery type	Rechargeable LiFePO4 Battery 6.4V 3.2Ah
Battery low voltage cut off	5.7V
Battery discharge current @ 6.4Vdc	0.73A
Lamp	2 X 2W
Lamp colour	5000K
Lamp lumen level in emergency	510 lm
Nominal lamp voltage	V <sub>rated</sub> = 3Vdc
Nominal lamp current	I <sub>rated</sub> = 1.3A CC
Nominal lamp power	P <sub>rated</sub> = 2x2W
Maximum output voltage with no lamp connected	U-OUT = 10Vdc
Ingress protection	IP40
Cable entry	Sides, Rear
Luminaire class	Class II
Product Weight	0.80 Kg
Packaging Weight	0.02Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity.

### Materials

Housing: ABS

Standard Colour: White - RAL 9016  
 Alternative Colours: Black - RAL 9017  
 Add **/BL** to Order Code

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add **/10Y** to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)		
						A	B	C
Standalone	DE2NM3/L4W/**/SM	Non-Maintained	6.4V, 3.2Ah LiFePO4	70269	510	150	39	150
Alternative Systems Available: Specification Sheets Available Upon Request								
DALI	DE2NM3/L4W/**/SMDA	Non-Maintained	6.4V, 3.2Ah LiFePO4	70269	380	150	39	150
DALI Wireless	DENM3/L3WSM/DAW	Non-Maintained	6.4V, 3.2Ah LiFePO4	70262	400	220	41.5	168
Self-Test	DE2NM3/L4W/**/SM/ST	Non-Maintained	6.4V, 3.2Ah LiFePO4	70269	380	150	39	150

\*\* - Replace with OP for Open Plan/Symmetrical Fitting and ES for Escape Route/Asymmetrical Fitting

### Photometrics

Mounting Height	Lighting level directly under Luminaire (Lux)	Luminaire Spacing (Metres)													
		Escape Route						Open Plan							
		0.5lx 1.0lx		0.5lx 1.0lx		0.5lx 1.0lx		0.5lx 1.0lx		0.5lx 1.0lx		0.5lx 1.0lx			
2m	26.90	3.7	3.1	8.8	7.4	15.3	14.0	21.8	20.6	10.3	9.5	6.6	5.4	16.0	13.2
2.5m	17.22	4.1	3.3	9.9	8.2	18.1	16.3	26.3	24.4	12.2	11.1	7.3	5.7	17.7	14.5
3m	11.96	4.4	3.5	10.8	8.9	20.6	18.4	30.4	27.9	14.0	12.6	7.7	5.9	19.1	15.4
4m	6.73	4.9	3.7	12.3	9.8	25.0	21.9	37.8	34.1	17.1	15.1	8.2	6.1	21.5	16.4
6m	2.99	5.2	3.4	14.0	10.5	-	-	-	-	17.3	8.6	5.8	23.4	17.2	
8m	1.68	5.0	2.8	14.8	10.0	-	-	-	-	14.3	8.3	4.6	24.2	16.7	
10m	1.08	4.5	1.2	14.8	9.1	-	-	-	-	7.5	7.5	1.4	24.1	15.0	

