
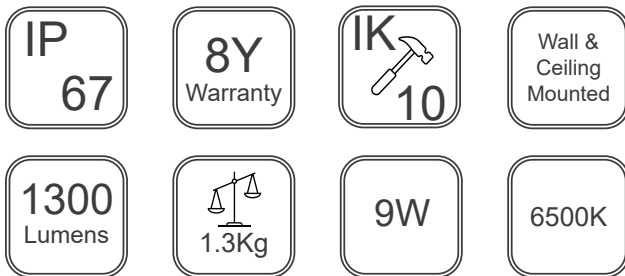


# SKYLUX IP67

## 9W Emergency Slave Bulkhead

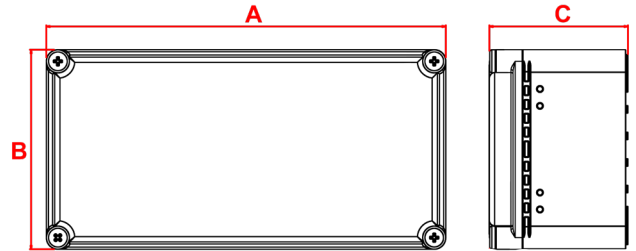

Order Code	<b>ZSKL9W230SIP67</b>
Mode of operation	Slave
Input voltage	220-240V AC
Power consumption	6VA
Lamp	30x0.3W CREE medium power LED's
Lamp colour	6500k
Lamp lumen level in emergency	1300
Nominal lamp voltage	17.5V
Nominal lamp current	0.47A
Nominal lamp power	9 Watts
Maximum output voltage with no lamp connected	U-OUT=22V DC
Ingress Protection	IP67
Impact Resistance	IK10
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Luminaire class	Class I
Product Weight	1.3 Kg
Packaging Weight	0.17Kg
Standards	EN61347-2-7, EN 60598-2-22, EN 55015
Environment	0°C to 55°C up to 80% relative humidity

### Materials

Housing: Polycarbonate (Base)  
Clear Polycarbonate (Diffuser)

Geartray: Painted sheet steel

Standard Colour: Grey  
Alternative Colours: Available on request

### Warranty

Standard Warranty: 8 Years  
Alternative Warranty: 10 Years  
Add /10Y to order code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)		
						A	B	C
Central Battery	ZSKL9W230SIP67	Slave	n/a	n/a	1300	379	189	132
Alternative Systems Available:								
Standalone	ZSKNM3LED9WIP67	Non-Maintained	9.6V 4.5Ah NiCd	70247	1300	379	189	132
DALI	ZSKNM3L10WIP67DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	1400	379	189	132
Self-Test	ZSKNM3L10WIP67ST	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	1400	379	189	132

### Photometrics

Mounting Height	Lighting level directly under Luminaire	↔		↔		↔		↔		↔	
		0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0	0.5	1.0
2m	<b>52.64</b>	13.7	11.3	32.8	27.4	30.7	25.4	28.7	23.5	11.7	9.7
2.5m	<b>33.71</b>	15.2	12.5	36.5	30.3	34.0	28.1	31.5	25.9	13.0	10.7
3m	<b>23.42</b>	16.5	13.4	39.8	32.9	36.9	30.6	34.0	28.2	14.1	11.5
4m	<b>17.21</b>	17.6	14.3	43.3	35.1	39.4	32.7	36.5	30.2	15.1	12.1
6m	<b>13.18</b>	18.6	15.0	46.5	37.1	41.8	34.5	38.8	31.9	15.9	11.5
8m	<b>10.42</b>	19.5	15.7	49.5	38.9	44.0	36.1	40.9	33.3	16.7	12.1
10m	<b>8.44</b>	20.3	15.2	52.1	40.5	45.8	37.4	42.9	34.4	17.2	12.7

