


ZKPM4DALI50V

50V DALI Conversion Kit

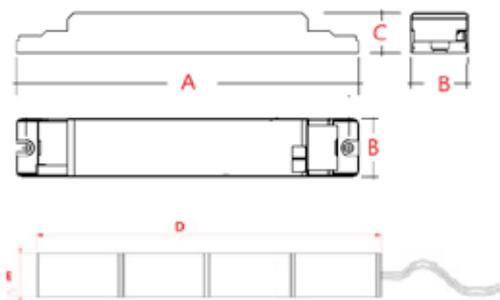

Materials

Charger Housing: Polycarbonate
 Battery Fixing Clips: PVC

Warranty

Standard Warranty: 3 Years

| | |
|-------------------------------------|---|
| Order Code | ZKPM4DALI50V |
| DALI Interface | For Controlled Monitoring and Reporting |
| Mode of operation | Maintained -When used with existing Independent Mains LED driver. |
| Independent Mains LED driver. | 3 hours |
| Power Consumption | 16VA |
| Input voltage | 220/240V (207VAC - 264VAC) 50/60Hz |
| Battery type | Rechargeable NiCad Battery 4.8V 4.5Ah |
| Battery low voltage cut off | 4V DC |
| Battery discharge current @ 4.8V DC | 0.8A |
| Nominal charge current range | 300mA |
| Typical Output Power | 3.5W |
| Output Voltage Range | $U_{rated} = 10-54V$ DC |
| Output Current Range | $I_{rated} = 60-160mA$ |
| Maximum open circuit | U-OUT=60V |
| Indicator LED | Bi-Colour (Red/Green) |
| Product Weight | 0.8Kg |
| Ingress Protection | IP20 |
| Standards | EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015 |
| Environment | 0°C to 45°C up to 80% relative humidity |

| System | Order Code | Battery | Battery P/N | Dimensions (mm) | | | | |
|--------|--------------|-------------------|-------------|-----------------|----|----|-----|------|
| | | | | A | B | C | D | E |
| DALI | ZKPM4DALI50V | 4.8V, 4.5Ah NiCad | 70123 | 179 | 30 | 21 | 236 | 32.5 |