


LUX5IVE

Product Features

- 1.5 Watt Lamp.
- 3mA Line Current Consumption.
- Ensures 5 Lux on Callpoint.
- Fits on Most Manual Callpoints.
- Easy to Install.
- Uses Fire Power Supply.
- Sleek, Minimalist Design.
- Protective Front Guard.
- IP20.

Materials

- Housing – ABS (RAL 3020).
- Front Cover – Polycarbonate.
- Dimensions – See diagram.

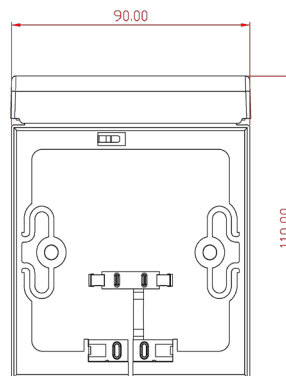

Standard colour:



Red - RAL 3020

Part Number

LUX5IVE