


# WTL 2X9W

## IP67 Emergency DALI Slave Twinspot

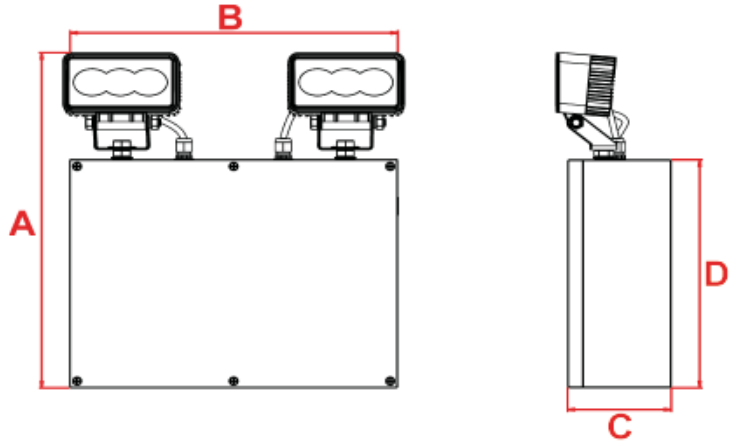

IP 67	8Y Warranty	Class I	Wall Mounting
2x490 Lumens	3.4Kg	6000K	

Order Code	ZWTL2X9WL230SDA
Mode of operation	DALI 2 Slave
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Lamp	2 x LED lamp heads total wattage 18 watts Each LED lamp contains 3 high power LEDs Swivel & Tilt Lamp Heads
Lamp lumen level emergency	490 lumens for each lamp head
Degree of protection	IP67
Power consumption	18VA
Inrush Current	5A 150 <sub>us</sub>
Cable entry	To be Drilled and Glanded on installation (Glands not included)
Weight	3.4kg
Packaging Weight	0.235 kg
Standards	EN 60598.2.22 EN61347-2-7 EN55015
Environment	0°C to 55°C up to 80% relative humidity

### Materials

Housing: Polycarbonate  
 Lamp Heads: Die cast aluminum with polycarbonate lenses  
 Standard Colour: Grey RAL 7032

### Warranty

Standard Warranty: 8 Years  
 Alternative Warranty: 10 Years  
 Add /10Y to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI Central Battery	ZWTL2X9WL230SDA	Slave	n/a	n/a	2 x 490	348	316	100	237
<b>Alternative Systems Available:</b>									
Standalone	WTL2X9WLED/NM3	Non-Maintained	12V 7Ah SLA	70162	2 x 490	348	316	100	237
DALI	WTL2X5WLED/NM3/DA	Non-Maintained	9.6V 6.4Ah LiFePO4	70255	2 x 350	348	316	100	237
Central Battery	ZWTL2X9WL230S	Slave	n/a	n/a	2 x 490	348	316	100	237