


# Waylite

## IP65 Emergency Bollard

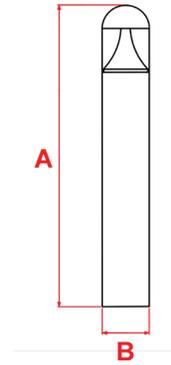

1700 Lumens	20 Watts	4000K	Floor Mounting
NiCd Battery	Class I	IP 65	6Y Warranty

Order Code	<b>WLB/LED/230</b>
Mode of operation	Maintained
Emergency duration	3 Hours
Input voltage	230/240V 50/60Hz
Battery type	4.8V 4.5Ah NiCd
Lamp	LED
Lamp colour	4000K
Lamp lumen level in emergency	340Lm
Lumens/Watt	85
Ingress Protection	IP65
Impact Resistance	IK08
Cable entry	Base of product
Luminaire class	Class I
Product Weight	4Kg
Packaging Weight	0.5Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

## Materials

Housing: Die Cast Aluminium  
Diffuser: Polycarbonate

Standard Colour: Black - RAL 9017

## Warranty

Standard Warranty: 6 Years  
Alternative Warranty: 10 Years  
Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Mains)	Lumens (Emergency)	Dimensions (mm)	
							A	B
Mains	WAY/LED/230	Mains	-	-	1700	-	1015	160
Alternative Systems Available: Specification Sheets Available Upon Request								
Standalone	WAYM3/LED	Maintained	4.8V 4.5Ah NiCd	70184	1700	340	1015	160
DALI	WAYM3/LED/DA	Maintained	6.4V 6.4Ah LiFePO4	70258	1700	425	1015	160
Self Test	WAYM3/LED/ST	Maintained	6.4V 6.4Ah LiFePO4	70258	1700	425	1015	160
Central Battery	WAYM/LED/230MFRS	Slave	-	-	1700	-	1015	160

Available Accessories		
Order Code	Description	Material
WLB/RootKit	Root Kit	Stainless Steel