


Exit Box Gen 2

Wall Mounted Exit Sign

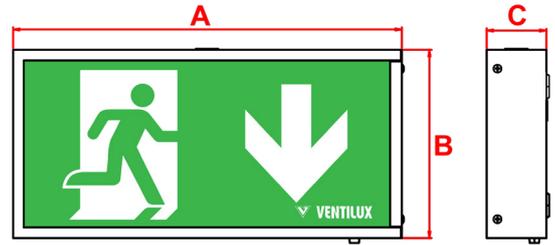

33M Viewing Distance	IP 20	LiFePO4 Battery	Wall Mounting
1.5Kg	5500K	Class I	4Y Warranty

Materials

Housing: Folded Sheet Steel
Panel Legend: Polycarbonate

Standard Colour: White - RAL 9016

Warranty

Standard Warranty: 4 Years
Alternative Warranty: 8 Years
Add **18Y** to Order Code

Order Code	EB2M3/LED/**
Mode of operation	Maintained
Emergency duration	3 hours
Input voltage	230/240V (207VAC - 264VAC) 50/60Hz
Power consumption	10VA, $I_{nom} = 42mA$ (Full Battery)
Battery type	Rechargeable LiFePO4 3.2V 1.5Ah
Battery low voltage cut off	2.6V DC
Battery discharge current @ 3.2V DC	0.24A
Lamp	2W LED Strip
Lamp colour	5500K
Viewing Distance	33m
Lamp Lifetime	$L_{80} B_{50}$
Nominal lamp voltage	$V_{rated} = 5.8V$ DC
Nominal lamp current @ 3.2V	$I_{rated} = 120mA$ CC
Nominal lamp power @ 3.2V	$P_{rated} = 0.6W$
Maximum output voltage with no lamp connected	U-OUT = 8V DC
Ingress protection	IP20
Cable entry	20mm on top and rear of product
Luminaire class	Class I
Weight	1.5 Kg
Standards	EN61347-2-7, EN61347-2-13, EN 60598-2-22, EN 55015
Environment	0°C to 45°C up to 80% relative humidity

System	Order Code	Mode of Operation	Battery	Battery P/N	Viewing Distance	Dimensions (mm)		
						A	B	C
Standalone	EB2M3/LED/**	Maintained	3.2V, 1.5Ah LiFePO4	70165	33m	390	190	60

**Alternative Legends



Replace ** with 01 to include
Left Arrow
PN: 01028



Replace ** with 02 to include
Down Arrow
PN: 01029



Replace ** with 03 fo include
Right Arrow
PN: 01030



Replace ** with 04 to include
Up Arrow
PN: 01034