



Weatherproof Cold Room


IP65 Cold Room Dali Bulkhead

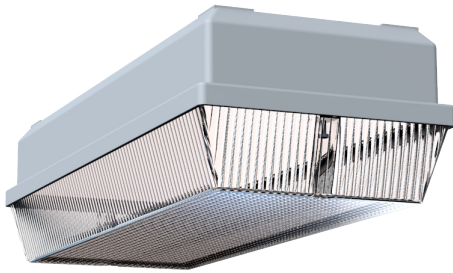

Luminaire

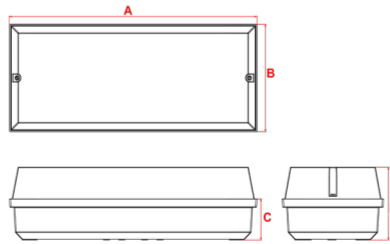

Remote Pack

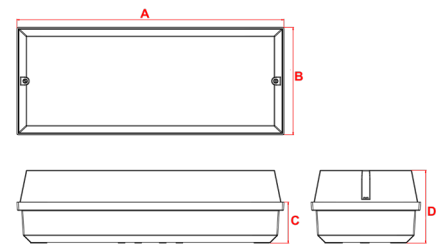

420 Lumens	3 Watt	6000K	Wall and Ceiling Mounting
Class I	IP 65	IK 10	6Y Warranty

Materials

Luminaire Housing: Polycarbonate
 Remote Housing: Polycarbonate
 Standard Colour: White - RAL 9016
 Alternative Colours Available Upon Request

Order Code	ZWPNM3LDARPWPCR
Mode of operation	Non-Maintained Dali
Emergency duration	3 hours
Input voltage	230/240V 50/60Hz
Power consumption	7VA, Inom.=30mA
Battery Type	Rechargeable Ni-Cd 6V 4.5Ah
Battery low voltage cut off	3V
Nominal battery discharge current	0.485A
Lamp	3x1 watt WHITE CREE LED - 50000 hr
Lamp colour	Cool white 6000K
Lumen level	420 lm
Ingress Protection	IP65 (Luminaire) IP65 (Remote Pack)
Impact Resistance	IK10
Cable Entry	20mm on sides and Rear
Luminaire class	Class I
Product Weight	1.5Kg
Packaging Weight	0.17Kg
Standards	EN 60598-2-22, EN 61347-2-7, EN 55015
Environment	-20°C to +20°C - Not suitable for ambient temperatures greater than 20°C

Warranty

Standard Warranty: 6 Years
 Alternative Warranty: 10 Years
 Add /10 Years to Order Code

System	Order Code	Mode of Operation	Battery	Battery P/N	Lumens (Emergency)	Dimensions (mm)			
						A	B	C	D
DALI	ZWPNM3LDARPWPCR	Non-Maintained	6V, 4.5Ah Ni-Cd	70153	420	370	152	58	102

Available Accessories

Order Code	Description	Material	Cutout (mm)	Dimensions(mm)	
WP/SRK	Semi-Recessing Kit	Powder Coated Steel	360 x 143	398	179